


11732210 and 11732211 2 port motorised valves are designed to provide zone control for heating and hot water.

There are two versions, for either 22mm or 28mm pipework.

Compression fittings are supplied. These valves have a replaceable actuator head, which can be exchanged without needing to drain- down the system.

Technical specification:

- Synchronous motor drive / spring return action.
- 1m 5-core flex.
- Industry standard flex colours:
white; blue; grey; orange; green/yellow
- Auxiliary switch
- Switch rating 3A resistive
- Integrated manual lever for commissioning purposes.
- Supply 230V 50Hz / power consumption 6W
- Operating temperature range: +5 to 88°C
- Maximum differential pressure 1 Bar
- Maximum static pressure 10.0 Bar.

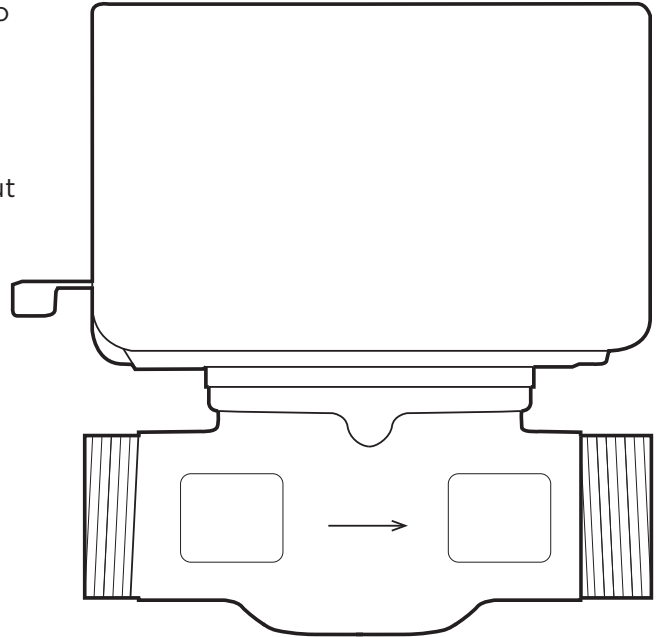

Typical wiring circuit using two zone valves, programmer, room thermostat and cylinder thermostat

