





# Towel Warmer - Technical Specification

**Primaflow**

**F&P**


WE SIMPLY DELIVER MORE

## 425310CP

	<b>EAN</b>	<b>5060235344572</b>
	<b>Finish</b>	<b>Curved Chrome</b>
	<b>Width</b>	500mm
	<b>Height</b>	1800mm
	<b>Fitted Depth</b>	89mm
	<b>Horizontal Profile Size</b>	22mm
	<b>Vertical Profile Size</b>	40mm x 30mm D Shaped
	<b>Thread to Thread Centre</b>	455mm
	<b>Wall to Thread Centre</b>	62mm
	<b>Thread Orientation</b>	Vertical Into Bottom
	<b>Thread Size</b>	1/2" BSP
	<b>Weight</b>	12.2 kg

### Installation & Usage Options


Central Heating System

	<b>Thermal Output dt50</b>	514 Watts – 1754 BTU
	<b>Thermal Output dt30</b>	266 Watts – 907 BTU
	<b>Maximum Working Pressure</b>	1000 kPa – 10 Bar

Option – Electric Only or Dual Fuel

	<b>400 Watts Electrical Element Kit – EAN 5060235341519</b>
------------------------------------------------------------------------------------	-------------------------------------------------------------

### Fitted Dimensions

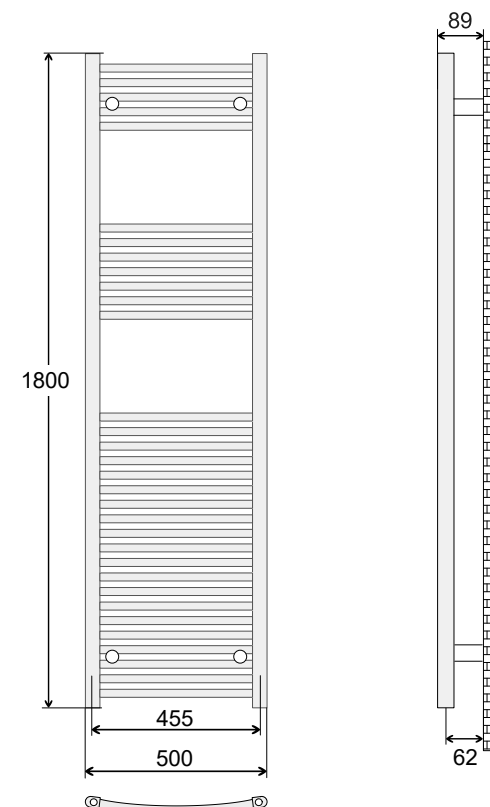

### Product Information

Conform to EN 442 standard

CE Mark applied

Brackets and Fixings included

### Specification

Pressure tightness: No leakage at 1.3 x MOP

Resistance to pressure: No breakage at 1.69 x MOP

Maximum operating pressure (MOP): 1000 kPa

Maximum surface temperature: 110°C

Resistance against corrosion: No corrosion after 100 h humidity

Primaflow F&P

Votec House, Hambridge Lane, Newbury, RG14 5TN