

Elina Concentric Type 3 TMV Mixer

Thermostatic Inclusive Mixer Shower

Product Codes

Elina Type 3 TMV Concentric Mixer Shower - Built-in (Valve and grab kit)	ELICMINCBT
Elina Type 3 TMV Concentric Mixer Shower - Built-in (Valve Only)	ELICMINCBTVO
Elina Type 3 TMV Concentric Mixer Shower - Exposed (Valve Only)	ELICMINCEXVO
Elina Type 3 TMV Concentric Mixer Shower - Exposed (Valve and grab kit)	ELICMINCEX

Installation

- 15mm compression to flat face union
- 1/2" BSP bottom

End User

- Separate tamper proof flow and temperature controls for ease of use
- Automatic shutdown safety feature should either the hot or cold water supplies fail
- Thermostatic temperature control and Type 3 (TMV) approval for added peace of mind
- KIWA UK Reg 4 approved for water supply regulations compliance
- Grab kit includes dual purpose grab riser rail able to withstand up to 150kg
- Suitable for all pressure systems
- Rub clean, five spray pattern shower head
- 2m anti-twist hose




Elina Concentric Type 3 TMV Mixer

Thermostatic Inclusive Mixer Shower


Shower

Temperature Control	Thermostatic
Plumbing System Compatibility	All systems
Inlet Connection	15mm compression to flat face union
Outlet Connection	1/2" BSP bottom
Minimum Running Pressure/Flow	0.2 Bar @ 8 l/min
Maximum Running Pressure	5 Bar
Maximum Static Pressure	10 Bar
Flow Rate (min pressure) @ 0.1 Bar	7 l/min
Approvals, Complies with	KIWA Type 3 (thermostatic mixing valve), KIWA UK Water Regulation 4
Guarantee	5 years

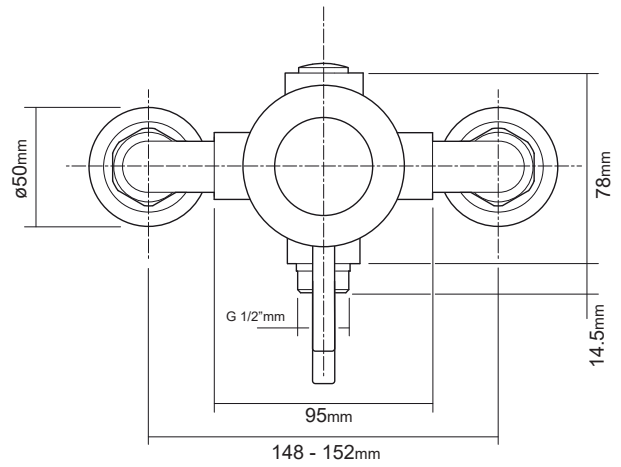

Riser Rail Kit

Standard version	
Length	Approx 940mm
Diameter	25mm
Material	Stainless steel
Hose	2m anti-twist

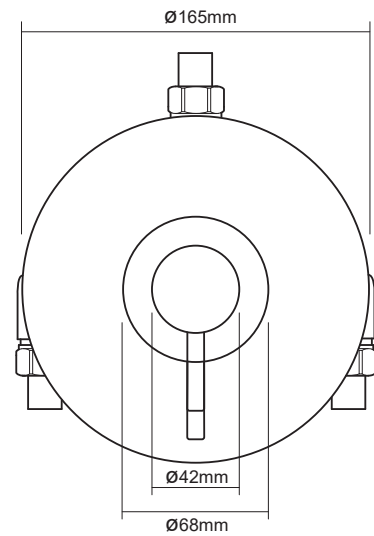

Inclusive Shower Grab Riser Rail - Chrome
TSKINCGRBCH



8000 | Care Five Spray Shower Head - Chrome
TSHECARECHR



2m Anti-twist Hose - Chrome
TSHG1266

Contact our specification team

Call: 02476 324 776 | **Email:** specification@tritonshowers.co.uk | **Web:** www.tritonshowers/specifiers

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.
 (2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.
 (3) The shower will operate down to 0.5 bar at reduced flow rates.